

Soldering Iron

Station Type Heavy Duty Soldering Iron

SOLDERING STATION FX-801 FAFE

Go Beyond the Limits! Super Power 300W to Change the World of Soldering



Make the impossible possible with Super Power of 300W Heaters.

FX-801 can provide tremendous heating performance with super power 300W composite tip.



workability.

Handles on unit body

Handles on unit body make it easy to carry after work.

Easy tip replacement makes tip replacement easy.

Sleep/Shut-off function

Safety design automatically enters sleep/shut-off function when iron is placed in iron holder. The function automatically cools down tip temperature and shut-off power when not in use for a certain period of time.

Preset mode

Up to 6 settings can be preset and easily called up by Up/Down buttons.

Large LED display

An LED display roughly double the size of a conventional model is very easy to see.

Password function

Settings can be locked from unnecessary changes by password function.

HAK FX-801 82



(**A b C d E F**) Selectable alphabets for password


Compatible with N2 System Replacing an iron part (FX-8002) with an optional N2 iron part (FX-8003), enables use of N2 system. Appropriate option nozzles for each tip shape are necessary.



Compact and lightweight (50g) for heavy duty 300W iron


The same weight as the FM-2030 handpiece for comfort and better

The composite tip, a tip integrated heating element,

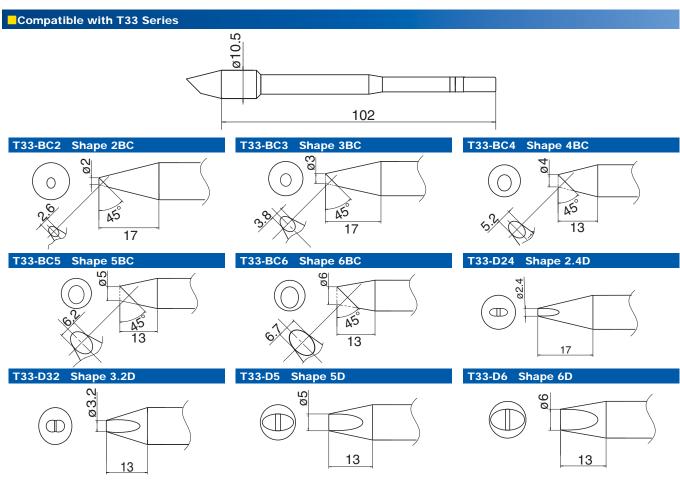

FX-801

Packing List



Soldering station (HAKKO FX-801), Soldering iron (FX-8002), Heat resistant pad, Power cord, Connecting cable, Iron holder (with cleaning sponge and cleaning wire), Instruction manual

Specifications

Station	
Power consumption	300W
Output voltage	AC 29V
Temperature range	50 to 500
Temperature stability	±5 at idle temperature
Dimensions	145(W)×107(H)×211(D) mm
Weight	3.9 kg
Soldering Iron	
Power consumption	260W (29V)
Tip to ground resistance	< 2
Tip to ground potential	< 2 mV
Cord length	1.2 m
Total length (without cord)	228 mm (with T33-BC4)

Weight (without cord) 50 g (with T33-BC4)

OVERSEAS AFFILIATES

HEAD OFFICE

4-5, SHIOKUSA 2-CHOME, NANIWA-KU, OSAKA, 556-0024 JAPAN TEL:+81-6-6561-3225 FAX:+81-6-6561-8466 http://www.hakko.com E-mail:sales@hakko.com

U.S.A. AMERICAN HAKKO PRODUCTS, INC.

28920 AVENUE WILLIAMS VALENCIA, CA 91355, U.S.A. TEL: (661) 294-0090 FAX: (661) 294-0096 Toll Free (800)88-HAKKO (42556)

http://www.hakkousa.com

Specifications and design are subject to change without notice. Copyright Hakko Corporation. All right reserved.

CA00461GbYa001 2015.1