



American Hakko Products, Inc.

P R O D U C T B U L L E T I N


Bulletin No: PB186

Issue Date: February 13, 2004

Product:
FP-102

Part No:
FP102-01

Specifications:

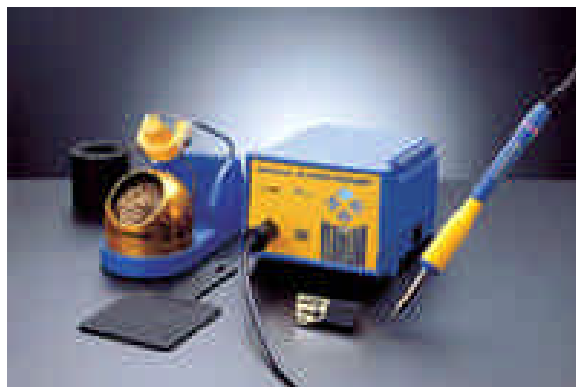

Power Consumption	75W			
Nominal Temperature Ranges	6.5 ~343°C ~650°F	7.0 ~371°C ~700°F	7.5 ~399°C ~750°F	8.0 ~427°C ~800°F
Temperature Stability	±5°C (±9°F) at idle temperature			

Station

Output Voltage	24V
Outer Dimensions	120(L) x 93(W) x 140(H) mm 4.7(L) x 3.7(W) x 5.5(H) in.
Weight	1.4 kg (3.1 lbs.)

Soldering Iron

Power Consumption	70W (24V)
Tip-to-Ground Resistance	Under 2 ohms
Tip-to-Ground Potential	Under 2mV
Total Length (w/o cord)	188 mm (7.4 in.) with T7-D24 tip
Weight (w/o cord)	30 g (0.067 lb./1.07 oz.) with T7-D24 tip
Cord	1.2m (4 ft.)

For pricing information, please contact your local American Hakko representative or our customer service department at (661) 294-0090.

From...

American Hakko Products, Inc.
28920 N. Avenue Williams.
Valencia, CA 91355
Tel: (661) 294-0090
Fax: (661) 294-0096
www.hakkousa.com
AHP14 Rev 2000-01

Comments:

The FP-102 is the next generation of the FP-101 soldering station (see PB 164). The FP-101 and the FP-102 share the same specifications, features and benefits with one exception; the FP-102 has the ability to operate the FM-2024 desoldering tool. The FM-2024 desoldering tool has an scheduled release date of May 2004.

Contents:

	FP-102 Soldering Station
FM-2021	Connector assembly
B2765C B2768C B2768C	Station includes one of the following sleeve assemblies: Sleeve assembly, yellow Sleeve assembly, orange Sleeve assembly, blue
B2839	Control card
634-01	Iron holder
B2300	Heat resistant pad
B2756	Tip tray

Tips are not included and must be purchased separately. For a complete list of available tips go to www.hakkousa.com.

Available:

February 1, 2004

For pricing information, please contact your local American Hakko representative or our customer service department at (661) 294-0090.

From...

American Hakko Products, Inc.
28920 N. Avenue Williams.
Valencia, CA 91355
Tel: (661) 294-0090
Fax: (661) 294-0096
www.hakkousa.com
AHP14 Rev 2000-01